

EAN: 6414150087912  
[static.oras.com/5738F](http://static.oras.com/5738F)



Bateria kuchenna Oras Care z wysoką wylewką. Ergonomiczna dźwignia zapewnia wygodę użytkowania w każdej sytuacji. Obrotowa wylewka 120 ° (kąt obrotu może być ograniczony do 0° lub 60°). Wbudowane opcje ograniczenia temperatury wody i maksymalnego natężenia przepływu. Elastyczne wężyki G3 / 8 ''.

- Kuchnia
- Opieka zdrowotna
- Jednouchwytowa
- Montaż powierzchniowy
- Chrom
- Wylewka obrotowa, Możliwość ograniczenia kąta obrotu
- Standardowy aerator
- Dźwignia długa, Pojedyncza dźwignia/uchwyt, Symbole Ciepła/Zimna
- Możliwość ograniczenia na głowicy maksymalnej temperatury i przepływu
- Ceramiczna głowica  $\varnothing$  40 mm do ustawiania przepływu i temperatury
- Elastyczne wężyki
- Mosiądz niskokorozyjny, 3S-Installation

## Dane techniczne

### Cechy przepływowe

Przepływ wody dla 300 kPa	<b>0.21 l/s</b>
Spadek ciśnienia dla przepływu (0.2 l/s)	<b>275 kPa</b>

### Właściwości techniczne


Woda ciepła zasilająca	<b>max. +80°C</b>
Ciśnienie robocze	<b>50 - 1000 kPa</b>
Wielkość przyłącza	<b>G3/8</b>
Projection	<b>178 mm</b>
Material	<b>brass</b>


### Przepisy prawne

EN standard	<b>EN 817</b>
Klasa głośności	<b>I (ISO 3822)</b>

### Certyfikaty i deklaracje

STF certyfikat	<b>EUFI29-20003722-TH</b>
KIWA SE	<b>1609</b>

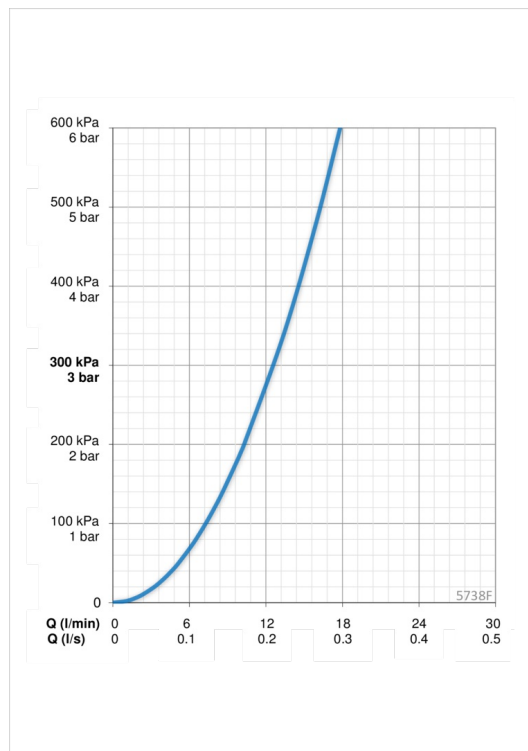

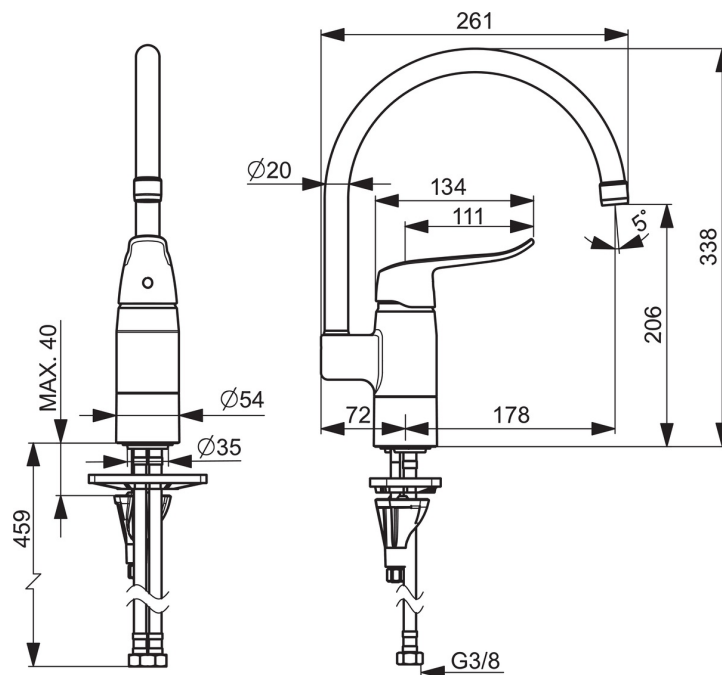

This exploded view diagram illustrates the components of a kitchen faucet assembly, numbered 1 through 14. The parts are as follows:

- 1:** A small cylindrical cap or plug for the spout.
- 2:** The main curved spout of the faucet.
- 3:** A set of three small O-rings or seals.
- 4:** A set of two larger O-rings or seals.
- 5:** Two side handles, each with a lever and a mounting screw.
- 6:** A decorative cap for the base of the faucet.
- 7:** A decorative ring or collar for the base.
- 8:** The main body of the faucet, including the cartridge and base.
- 9:** A set of three small O-rings or seals for the base.
- 10:** A set of three small O-rings or seals for the base.
- 11:** A decorative ring or collar for the base.
- 12:** The main body of the faucet, including the cartridge and base.
- 13:** A long, thin decorative rod or pin.
- 14:** A decorative cap or plug for the base.

	Nazwa	Kod
01	Aerator, M22x1	232201
02	Wylewka	159695V
03	Blokada wylewki, 120°	159670/10
03	Blokada wylewki, 60° /0°	159667/10
03	Blokada wylewki, 60° /0°	159667V
04	Zestaw uszczelniający	159499
05	Dźwignia, L=136	1005294V
05	Dźwignia długa, L=162	1004914V
06	Nasadka ochronna	602589V
07	Nakrętka mocująca	158726
08	Moduł sterujący	158890
09	Głowica , G1/2	602600V
10	Dźwignia zaworu pralkowego	1005697V
11	Uszczelka	1002371V
12	Płyta mocująca, 100x60mm	158825
13	Śruba mocująca, M8x1, L=130	1000780V
14	Zestaw mocujący	602610V